

**Automatic Balance Receiver  
Model Number: SJ-N-AR/1600**

**Product Description:**


**SJ-N-AR/1600** has automatic balance and compensation function. It is the best choice for long distance video transmission solution.

**Product Feature:**



- ◆ Transmission distance of color signal via CAT5 or CAT6
  - Up to 1,600m with SJ-01C ( Passive Transmitter )
  - Up to 2,000m with SJ-V-AT ( Active Transmitter )
- ◆ Automatic balance and compensation function
- ◆ Unique circuit design excellent anti-interference performance
- ◆ Built-in floating and three surge protection
- ◆ LED working status indication, 12VDC power supply



**Product Terminal and Dimension Introduction:**

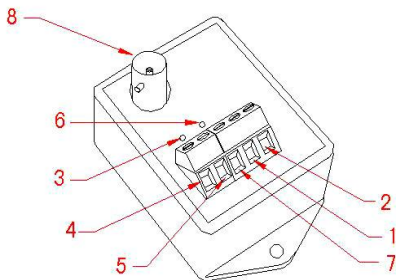

- ①---- DC IN+
- ②---- DC IN-
- ③---- Power Supply LED Indicator
- ④---- VIDEO In V + (UTP Cable)
- ⑤---- VIDEO In V- (UTP Cable)
- ⑥---- Video LED Indicator
- ⑦---- GND
- ⑧---- Video Output

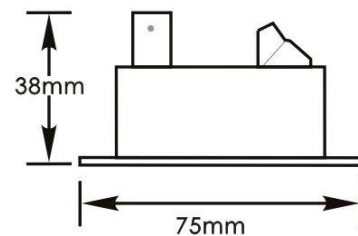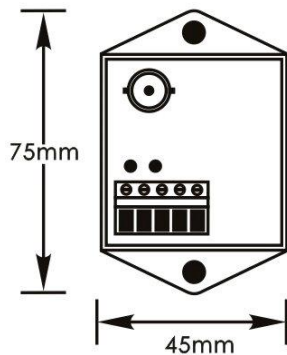

**Product Installation Instructions:**

---

- ◆ Connect POWER+/- terminal to power, then power indicator becomes light.
- ◆ Select one pair of UTP cable (It must be the same color) and respectively connect to VIDEO +/- of transmitter
- ◆ Connect BNC terminal to signal processing equipments (such as monitor etc.)
- ◆ Connect GND terminal to the ground

**Product Connection Diagram:**

---

