

Single Channel Active Video Transmitter
Model Number: SJ-021T

Product Description:


SJ-021T Active Video Transmitter provides extended distance between the CCTV camera and the DVR or multiplexer via copper twisted pair cable.

Product Feature:



- ◆ Transmission distance of color signal via CAT5/ CAT6 with SJ-021R active receiver can be up to 1200m
with automatic active receiver can be up to 2000m
- ◆ 12VDC power supply, 0.5W power consumption
- ◆ Built-in transient protection
- ◆ Dip switch control with 2-level adjustment for brightness and sharpness
- ◆ Excellent ability of low and Middle frequency clutter filtering



Product Terminal and Dimension Introduction:

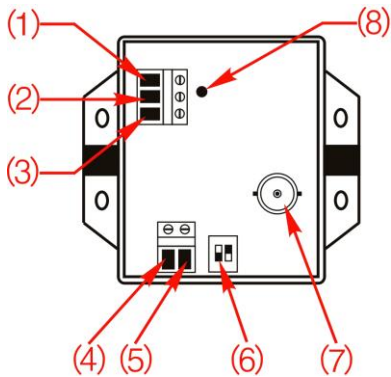

- | | |
|---------------------|---------------------------|
| (1) -- DC IN+ | (5) -- Video OUT V+ |
| (2) -- DC IN- | (6) -- 2 Level Dip Switch |
| (3) -- GND | (7) -- Video INPUT |
| (4) -- Video OUT V- | (8) -- Power Indicator |

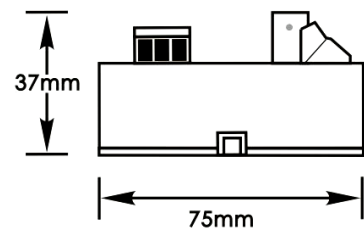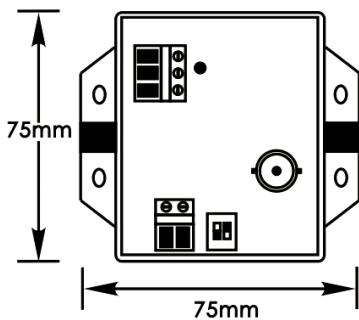

Product Code Settings:

	200m	400m	600m	800m	1000m	1200m	1500m
1	OFF	OFF	OFF	OFF	ON	OFF	ON
2	OFF	OFF	OFF	OFF	OFF	ON	ON

Product Installation Instructions:

- ◆ Connect POWER+/- terminal to power, then power indicator becomes light.
- ◆ Connect coming transmission video indicator to BNC terminal of transmitter, then green video indicator becomes light (ATTENTION: SJ-021T video indicator is red).
- ◆ Select one pair of UTP cable (It must be the same color) and respectively connect to VIDEO +/- of transmitter
- ◆ Adjust gain in line with distance dip switch diagram above.
- ◆ Connect GND terminal to the ground

Product Connection Diagram:

